




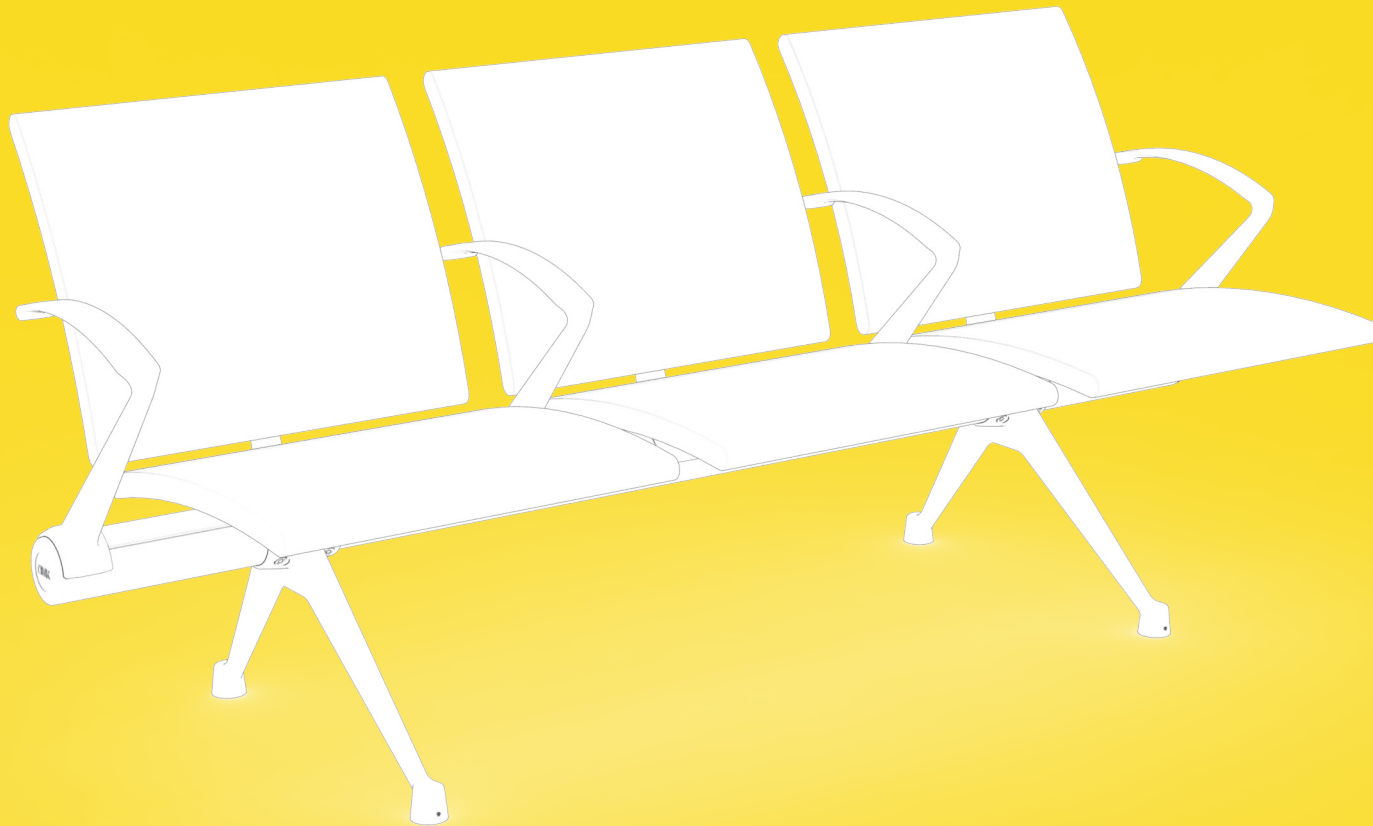

Flite Floor Fixed Assembly Instructions

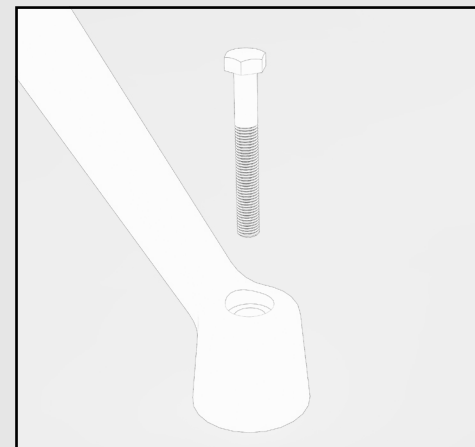


Standard Floor Fixed Leg

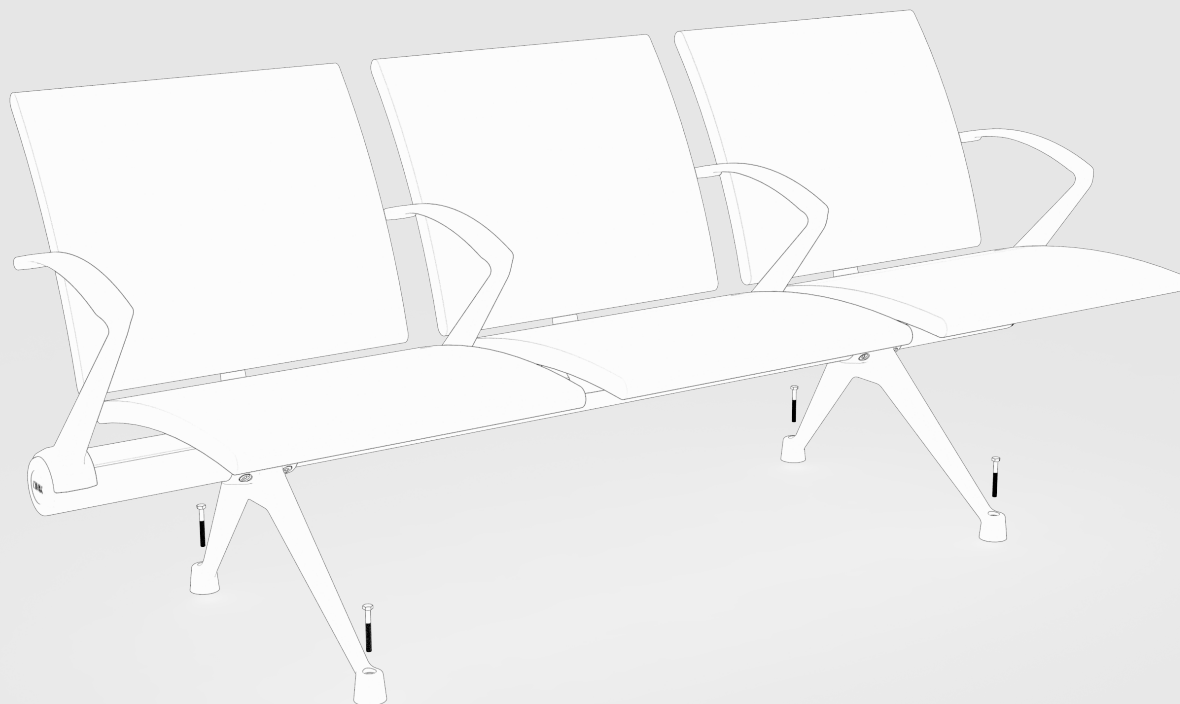


- *Position Flite seating unit over floor fixing points.*
- *Secure into place using M8 bolt.*
- *Note. Fixing type to be specified by contractor.*

Standard Floor Fixed Leg

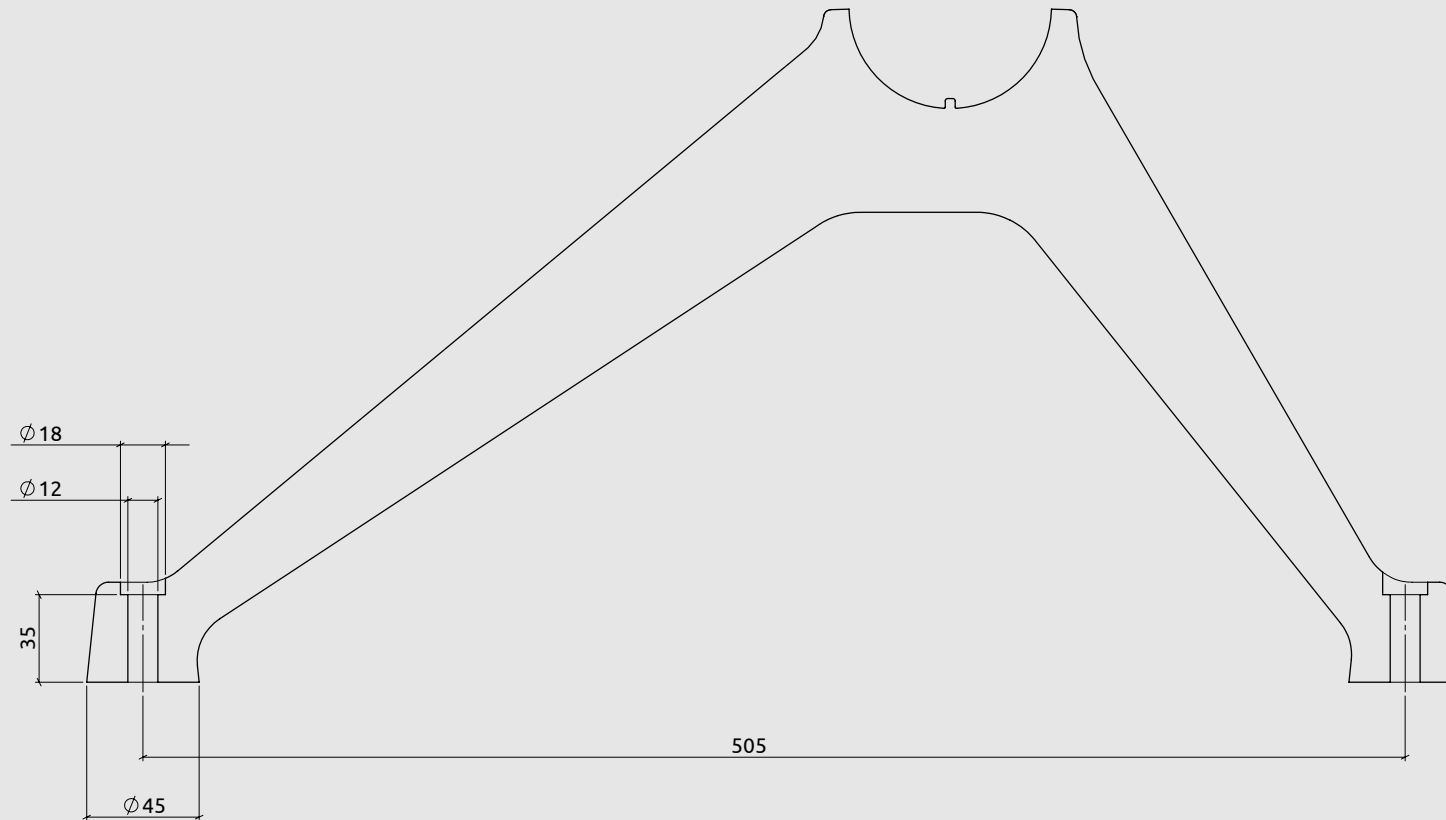



- Dimension front to rear of leg centres is 505mm.
- Dimension between separate legs on unit will vary depending on number of seats.
- Hole size 12mm with a 18mm counterbore for bolt head.

Hidden Floor Fixed Leg

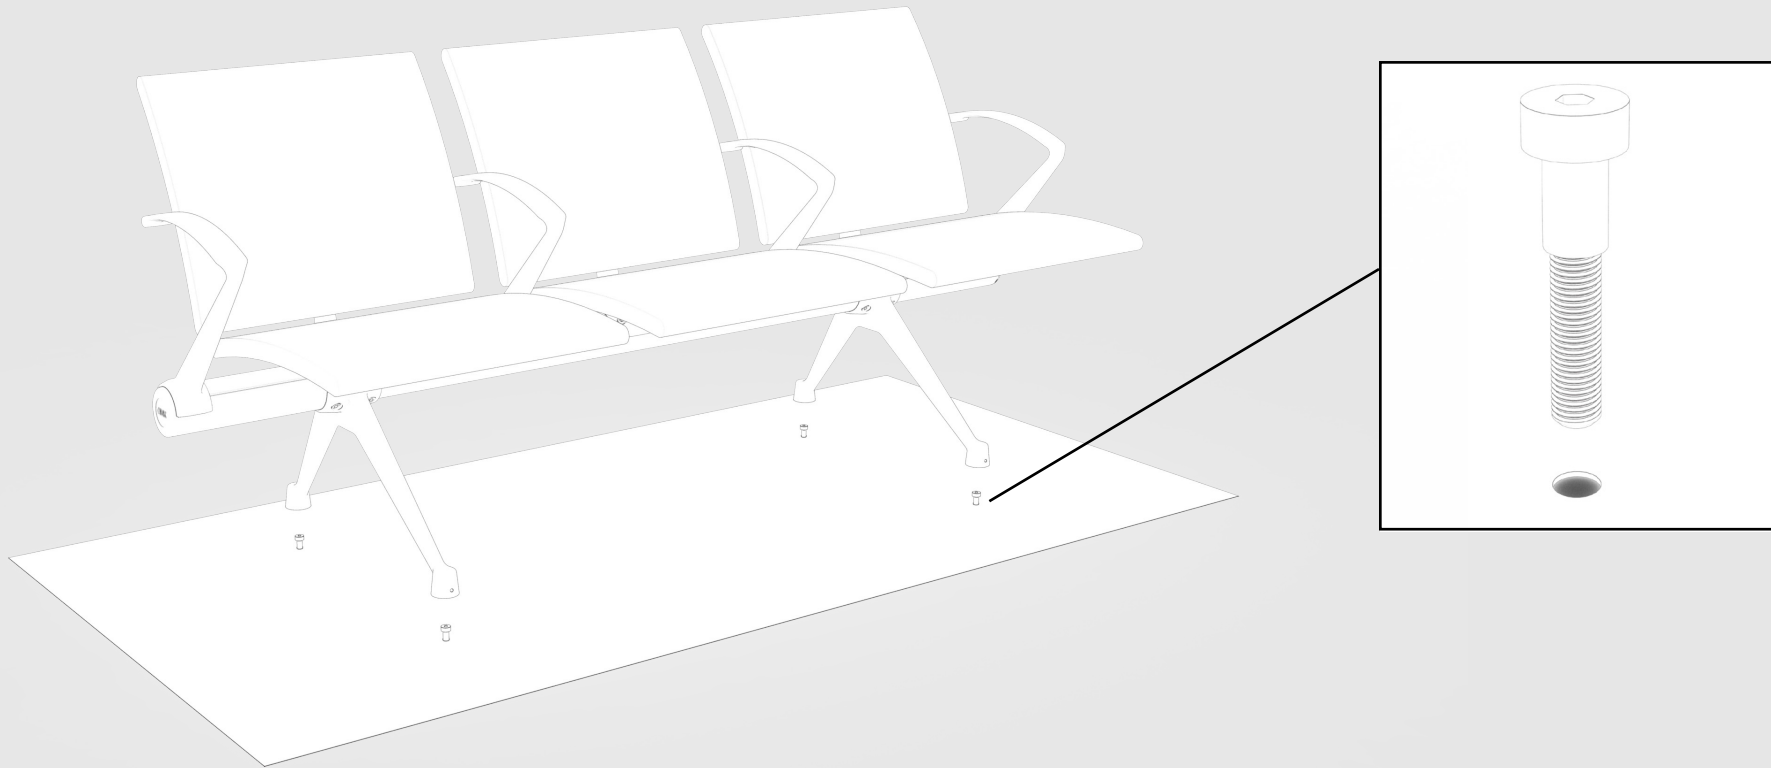


- *Fit Shoulder Bolts into Floor to correspond with location of feet.*
- *Lower Legs of Flite unit over head of Shoulder Bolt so that bolt sits inside Leg cavity.*

Hidden Floor Fixed Leg

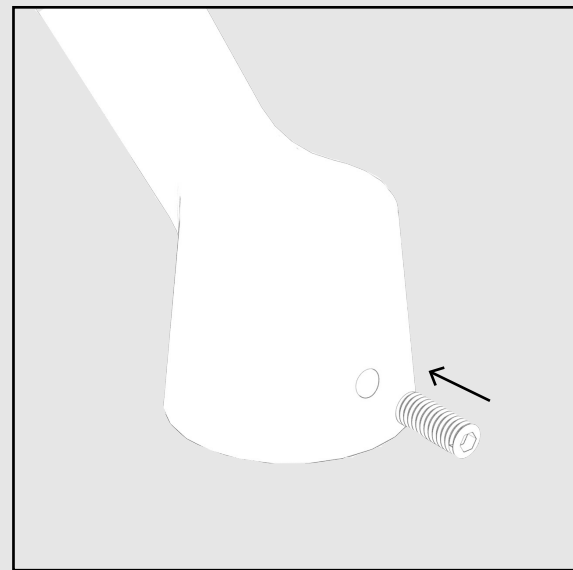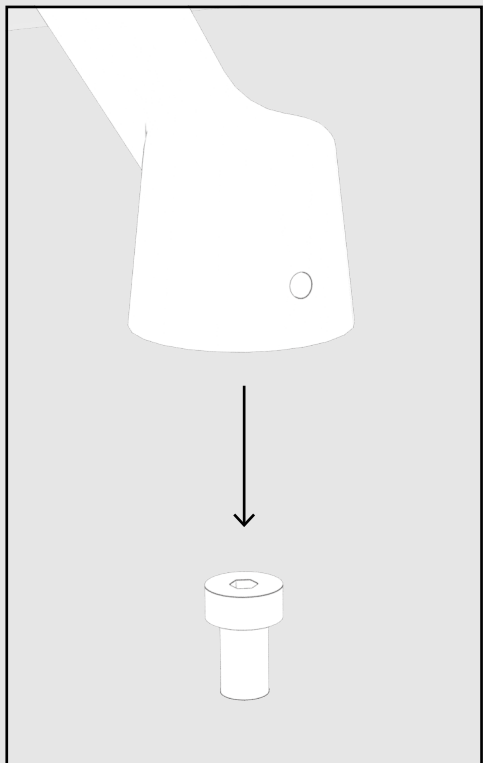

- *Once leg is in place over bolt and all legs are seated on floor, fix in place with Grub Screw on outside of FLITE leg and tighten until head is flush.*

Hidden Floor Fixed Leg

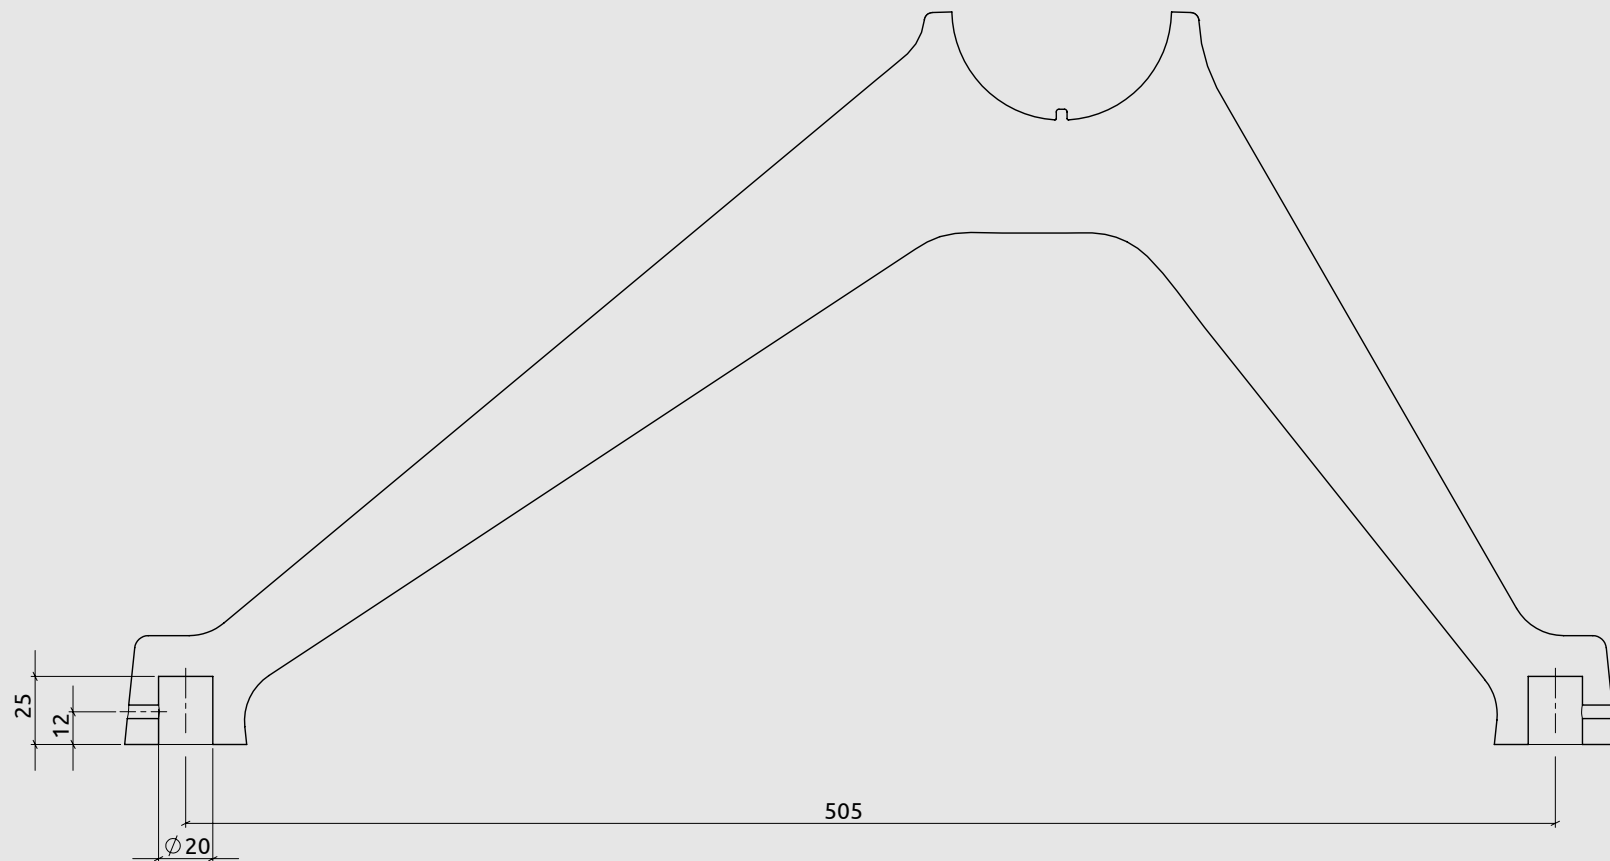

- Dimension front to rear of leg centres is 505mm.
- Dimension between separate legs on unit will vary depending on number of seats.
- Cavity for Shoulder bolt 20mm diameter, 25mm deep.

Contact Us

Our head office is located in central London where we manage global sales, design & production.

OMK Design Ltd.
30 Gresse Street
London, W1T 1QR
United Kingdom

enquiries@omkdesign.com

+44 (0)207 631 1335

